


# FP-9110

## Articulating Arm Instructions

TBC Consoles

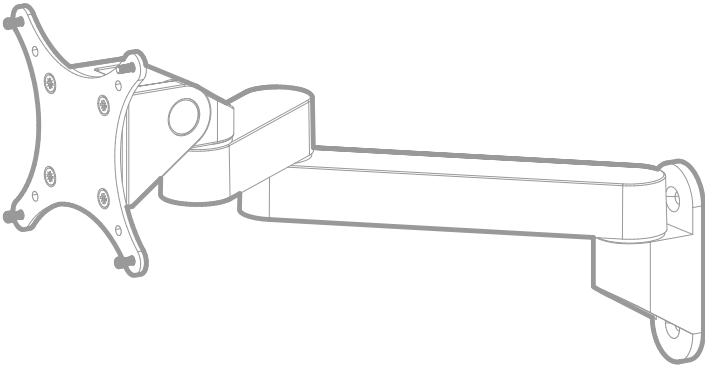


### CONTENTS:

- ARM PARTS ..... **PAGE 2**
- HARDWARE..... **PAGE 2**
- MONITOR FRAME ATTACHMENT..... **PAGE 3**
- UPRIGHT ATTACHMENT ..... **PAGE 3**
- WALL ATTACHMENT ..... **PAGE 4**
- REPLACEMENT PARTS ..... **PAGE 5**




# ARM PARTS




**A**

Vertical Mounting Cup  
Qty (1 of A or B)




**B**

Horizontal Mounting Plate  
Qty (1 of A or B)



**C**

9110 Monitor Arm  
Qty (1)



**D**

Monitor Arm Tilter  
Qty (1)



**E**

Dog Washer  
Qty (1)

# HARDWARE



**F**

5/16-18 x 5/8"  
Button Head Screw  
Qty (2)




**G**

10-32 x 3/8" Phillips  
Flat Head Screw  
Qty (6)



**H**

Dog Washer  
Qty (2)



**I**

5/16-18 Drop-in T-Nut  
Qty (2)




**J**

1/8" Allen Wrench  
Qty (1)




# MONITOR FRAME ATTACHMENT

## Step 1

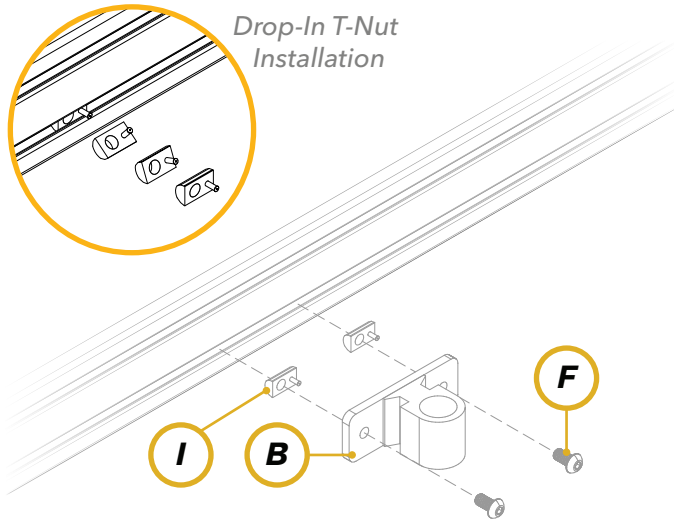

Insert the 5/16-18 Drop-In T-nuts (I) inside the Tier extrusion (See Illustration). Attach the Horizontal Mounting Plate (B) to the Tier using the 5/16-18 x 5/8" Button Head Screws (F).


## Step 2

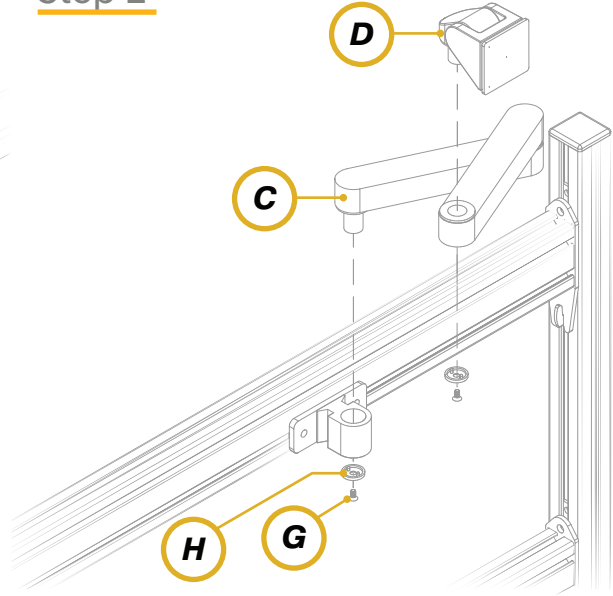

Attach the 9110 Monitor Arm (C) to the Mounting Cup (B) and secure using the 10-32 x 3/8" Philips Flat Head Screw (G) and Dog Washer (H). Attach the Monitor Tilter (D) to the 9110 Monitor Arm (C) and secure using the 10-32 x 3/8" Philips Flat Head Screw (G) and Dog Washer (H). Go to Step 3 on Page 4.


# UPRIGHT ATTACHMENT

## Step 1

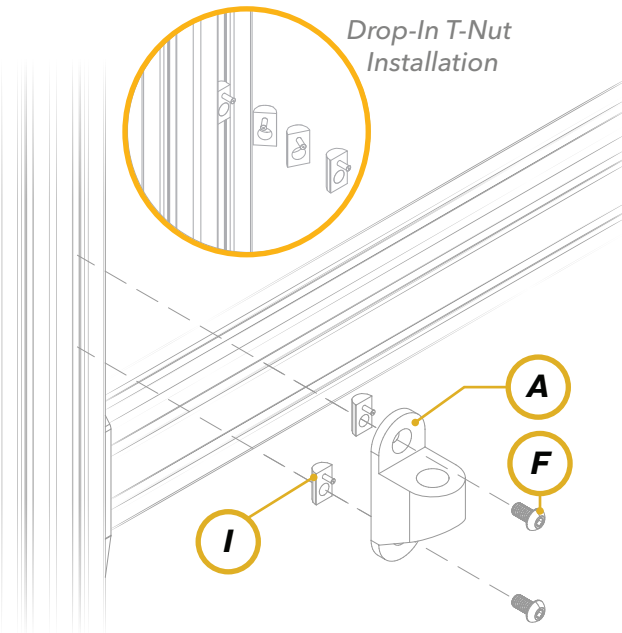

Follow instructions from Step 1 (above) using Vertical Mounting Cup (A) on the Tier extrusion.

## Step 2

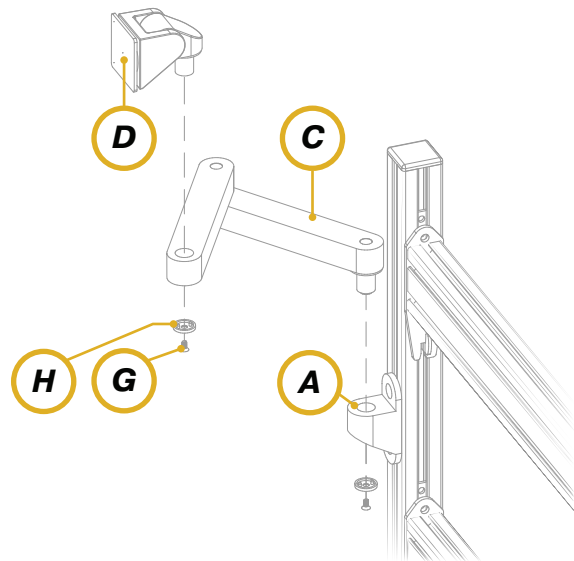


Follow instructions from Step 2 (above) using Vertical Mounting Cup (A) on the Tier extrusion.. Go to Step 3 on Page 4.




# WALL ATTACHMENT

## Step 1

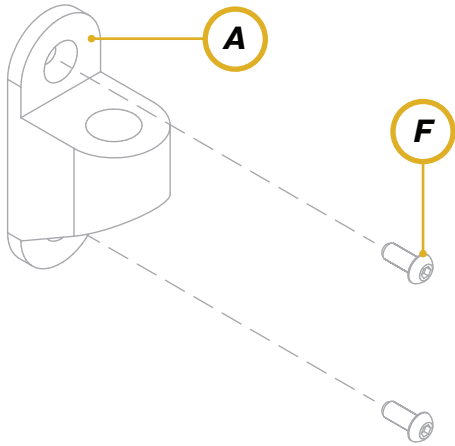

Attach the Vertical Mounting Cup to your facility wall using hardware that is acceptable according to building or town code.


## Step 2

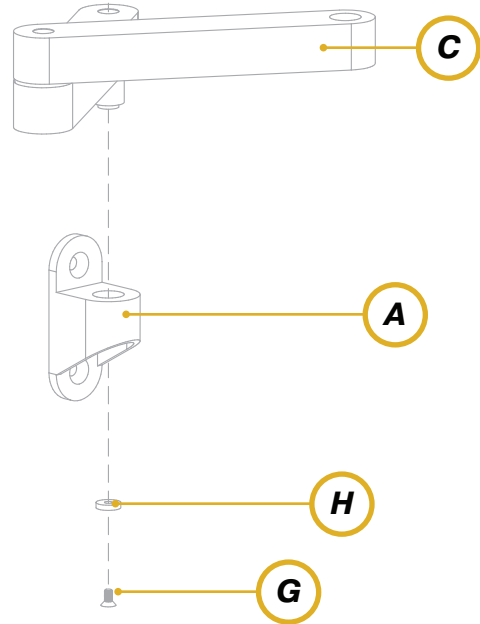

Attach the 9110 Monitor Arm (C) to the Vertical Mounting Bracket (A) and secure using the 10-32 x 3/8" Philips Flat Head Screw (G) and Dog Washer (H). Follow Remaining instructions from Step 2 on Page 3 and proceed to Step 3.


# FINAL STEP

## Step 3

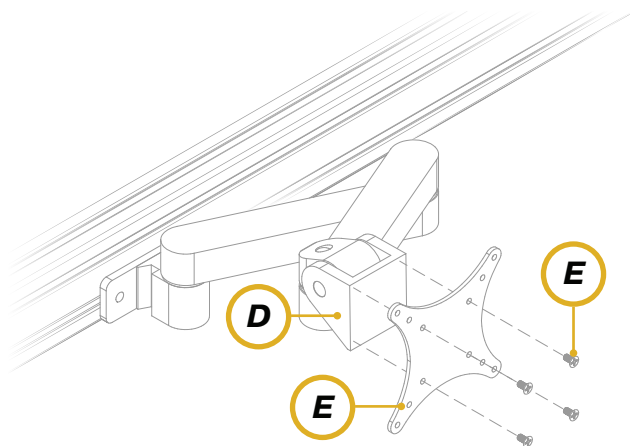

Attach the 75/100 mm VESA Adapter Plate (E) to the Monitor Tilter (D) using the 10-32 x 3/8" Philips Flat Head Screws (E).

## Optional (OmniMount Bracket Mounting)

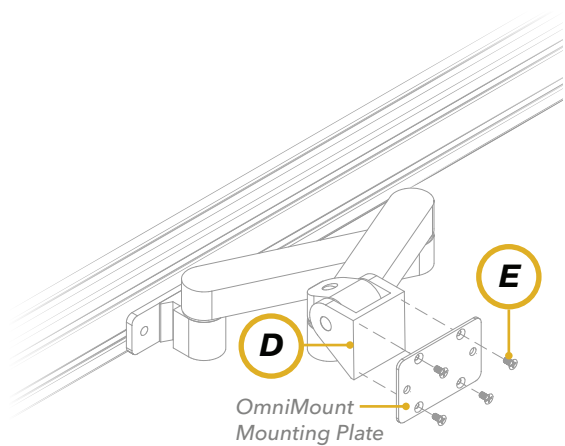

Attach the Omni Mounting Plate (E) to the Monitor Tilter (D) using the 10-32 x 3/8" Philips Flat Head Screws (E).



## REPLACEMENT PARTS

To purchase TBC replacement parts or learn about other TBC products, visit us online or call. [www.tbconsoles.com](http://www.tbconsoles.com) / 1-888-CONSOLE or (631) 293-4068.

- TBC Consoles provides a robust warranty on all our products, however, incorrect installation could void this warranty. Save time by engaging with our expert installation team, contact [support@tbconsoles.com](mailto:support@tbconsoles.com)
- All patterns, designs, and specifications are the intellectual property of TBC Consoles and may not be reproduced without prior written consent.
- These assembly instructions are meant as a guide. As we provide custom consoles based on a modular standard design, it is not possible to cover all possible customizations. In the event that a customization applies for your project beyond this guide then a detailed drawing or additional instructions will be provided.



170 Rodeo Dr.

Edgewood, NY 11717, USA

Phone 631.293.4068

Fax 631.293.4075

Toll Free 1.888.CONSOLE

[tbconsoles.com](http://tbconsoles.com)

All specifications and other information contained in this installation guide are based on the latest product information available at the time of printing. TBC Consoles is dedicated to product improvement and therefore reserves the right to make changes to the specifications of this and other products.

© TBC Consoles. Not to be reproduced wholly or in part without specific written permission from TBC Consoles.