

# RACK BOX

## ASSEMBLY INSTRUCTIONS

Read instructions prior to assembly. Contains parts that can be damaged if assembled incorrectly or in the wrong sequence. Assistance is required during some parts of the assembly; look for this "Helper" symbol:



### Needed for Installation:




3/16" Hex  
Wrench



4mm Hex  
Wrench



Helper




Level

### Step 1

On a level surface, align bracket with inserts in side of rack box. Tighten (4) 1/4-20 x 5/8" button head screws using Hex wrench.




1/4-20 x 5/8"  
Button head Screw  
(4 per bracket)

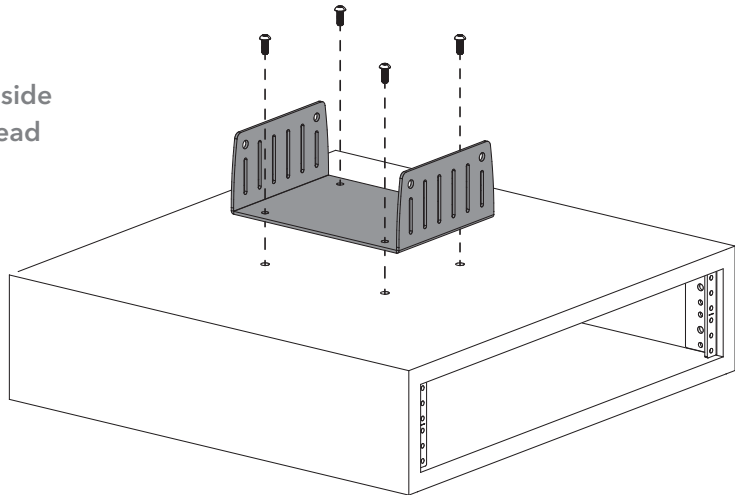

#### \*\*\*\*\*IMPORTANT\*\*\*\*\*



**BEFORE INSTALLATION ON ADJUSTABLE SMARTTRAC, SET WORKSURFACE HEIGHT TO LOWEST POSITION TO PREVENT COLLISION WITH RACK BOX**

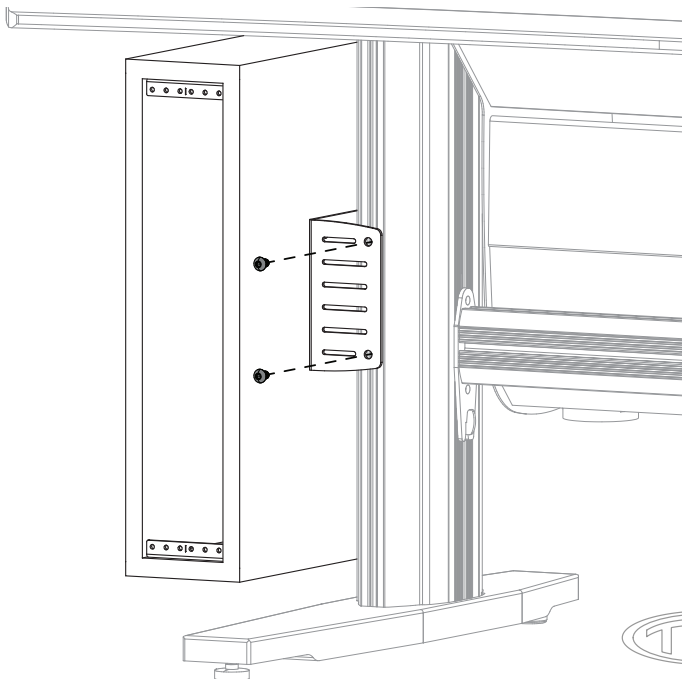

### Step 2



With a helper, place rack box at desired height along the leg. Using a level, attach using (2) 5/16-18 x 1/2" button head screws per side.



5/16-18 x 1/2"  
Button head Screw  
(4 per leg)

